

ENERGETIC VARIATIONAL APPROACH IN COMPLEX FLUIDS: MAXIMUM DISSIPATION PRINCIPLE

YUNKYONG HYON

Institute for Mathematics and Its Applications
University of Minnesota
Minneapolis, MN 55455, USA

DO YOUNG KWAK

Department of Mathematical Sciences
Korea Advanced Institute of Science and Technology
Daejeon 305-701, Republic of Korea

CHUN LIU

Department of Mathematics
Pennsylvania State University
University Park, PA 16802, USA

ABSTRACT. We discuss the general energetic variational approaches for hydrodynamic systems of complex fluids. In these energetic variational approaches, the least action principle (LAP) with action functional gives the Hamiltonian parts (conservative force) of the hydrodynamic systems, and the maximum/minimum dissipation principle (MDP), i.e., Onsager's principle, gives the dissipative parts (dissipative force) of the systems. When we combine the two systems derived from the two different principles, we obtain a whole coupled nonlinear system of equations satisfying the dissipative energy law. We will discuss the important roles of MDP in designing numerical method for computations of hydrodynamic systems in complex fluids. We will reformulate the dissipation in energy equation in terms of a rate in time by using an appropriate evolution equations, then the MDP is employed in the reformulated dissipation to obtain the dissipative force for the hydrodynamic systems. The systems are consistent with the Hamiltonian parts which are derived from LAP. This procedure allows the usage of lower order element (a continuous C^0 finite element) in numerical method to solve the system rather than high order elements, and at the same time preserves the dissipative energy law. We also verify this method through some numerical experiments in simulating the free interface motion in the mixture of two different fluids.

1. Introduction. The energetic variational approaches of hydrodynamic systems in complex fluids are the direct consequence of the second law of thermodynamics. The complex fluids in our interests are the fluids with micro-structures (molecular configurations), for instance, viscoelastic polymer models such as Hookean model, finite extensible nonlinear elastic (FENE) dumbbell models, rod like liquid crystal models, and multi-phase fluids [1, 2, 3, 7, 8, 14, 19, 25, 31, 32]. The

2000 *Mathematics Subject Classification.* Primary: 76A05, 76M99; Secondary: 65C30.

Key words and phrases. Energetic variational approach, dissipation energy law, least action principle, maximum dissipation principle, Navier-Stokes equation, phase field equations.

The first and third authors are partially supported by the NSF grants NSF-DMS 0707594. The second author supported by KOSEF grant by Korea government R01-2007-000-10062-0.

interaction/coupling between different scales or phases, plays a crucial role in understanding complex fluids. The interaction in polymeric fluids [2, 3, 8, 14, 25] can be described by the macroscopic deformation to the microscopic structure through kinematic transport and the macroscopic elastic stresses induced by the molecular configurations in microscopic level. A competition in multi-phase fluids [1, 19, 31, 32] can be described by the macroscopic kinetic energy and the internal “elastic” energy through the kinematic transport. The complex fluids thus are basically described by multiscale-multiphysics model.

We illustrate the energetic variational approaches for one of complex fluid model using the least action principle (LAP) [15] and the maximum/minimum dissipation principle (MDP) [22, 23, 24] to understand complex fluids. The energetic variational approaches have been employed to obtain reasonable model equations. However, a new coupled system of equations can be derived by the energetic variational approaches. The MDP, namely, Onsager’s principle, plays a crucial role in the derivation of the new coupled system. The advantage of such system is to allow us to use an efficient numerical scheme.

The energetic variation is based on the following energy dissipation law for the whole coupled system:

$$\frac{dE^{total}}{dt} = -\Delta$$

where E^{total} is the total energy of system and Δ is the dissipation [22, 23, 24]. The LAP, which is also referred as the Hamiltonian principle, or principle of virtual work, gives us the Hamiltonian (reversible) part of the system related to the conservative force. At the same time, the MDP gives the dissipative (irreversible) part of the system related to the dissipative force. The LAP, MDP can be written in the following form, respectively:

$$\delta E^{total} = f_c \cdot \delta \vec{x}, \quad \frac{1}{2} \delta \Delta = f_d \cdot \delta \vec{u} \quad (1)$$

where f_c is a conservative force, f_d is a dissipative force, \vec{x} is a position variable, and \vec{u} is a velocity field variable.

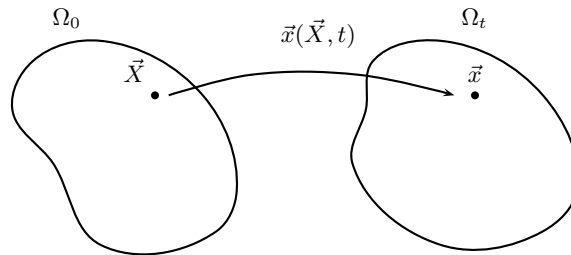


FIGURE 1. The flow map from the reference domain, Ω_0 to the current domain, Ω_t .

Here we introduce the basic mechanics background between the reference domain and the current domain at time t . The connection between these domains is the flow map. That makes it possible to do the variation with respect to domain. Let

Ω_0 be the reference domain, and Ω_t be the domain at time t with variables \vec{X} and \vec{x} in these domains, respectively. Then we can obtain the flow map (trajectory) from Ω_0 to Ω_t such as

$$\vec{x}_t(\vec{X}, t) = \vec{u}(\vec{x}(\vec{X}, 0), t), \quad \vec{x}(\vec{X}, 0) = \vec{X}.$$

The deformation tensor (strain) of the flow map is given by

$$F(\vec{x}(\vec{X}, t), t) = \frac{\partial \vec{x}(\vec{X}, t)}{\partial \vec{X}}$$

and satisfies the following transport equation:

$$F_t + \vec{u} \cdot \nabla F = \nabla \vec{u} F. \quad (2)$$

All evolutions/dynamics are based on the above relations of flow map between the reference domain, Ω_0 and the domain at time t , Ω_t . The deformation tensor F carries all the information of microstructures, patterns, and configurations.

We give an outline of this paper. In the next section, we discuss the energetic variational approaches with LAP and MDP for incompressible Navier-Stokes equation. In section 3, we present two-phase flow model with diffusive interface approach in complex fluids for LAP and MDP. In applying MDP, we first manipulate the dissipation in the energy through Allen-Cahn equation. And then we derive a system of equations for the two-phase flow problem satisfying the modified energy equation. In section 4, we perform numerical experiments to verify the system obtained by the energetic variational approaches and discuss its numerical results. In the last section, we give a conclusion on this work.

2. Energetic variations in simple fluids. In this section we consider a simple fluid model, and derive a system of equations using the energetic variational approaches with LAP and MDP. A simple fluid here means the fluid described by the incompressible Navier-Stokes equations [13, 30] which is given by

$$\begin{aligned} \rho(\vec{u}_t + \vec{u} \cdot \nabla \vec{u}) + \nabla p &= \mu \Delta \vec{u} \\ \nabla \cdot \vec{u} &= 0 \\ \rho_t + \nabla \cdot (\rho \vec{u}) &= 0 \end{aligned} \quad (3)$$

with a suitable boundary and initial conditions. Here, \vec{u} is the velocity field, ρ is the mass, p is the hydrostatic pressure, and μ is the viscosity. Then we easily obtain the following energy equation corresponding to the incompressible Navier-Stokes equation (3):

$$\frac{d}{dt} \int \frac{1}{2} \rho |\vec{u}|^2 d\vec{x} = - \int \mu |\nabla \vec{u}|^2 d\vec{x}. \quad (4)$$

The energy law (4) can be derived directly through the system (3). On the other hand, according to the energetic variation approaches, we can derive the equation (3) from the energy equation (4). In (4) we see that the total energy E^{total} and the dissipation Δ for (3) are

$$E^{total} = \int \frac{1}{2} \rho |\vec{u}|^2 d\vec{x}, \quad \Delta = \int \mu |\nabla \vec{u}|^2 d\vec{x}, \quad (5)$$

respectively.

We can then define the action functional \mathcal{A} for the incompressible Navier-Stokes equation with the kinetic energy,

$$\mathcal{A} = \int_0^T \int_{\Omega_t} \frac{1}{2} \rho |\vec{u}|^2 d\vec{x} dt. \quad (6)$$

Here we pull back the current domain, Ω_t , to the reference one, Ω_0 , through the flow map, $\vec{x}(\vec{X}, t)$. Then the action functional is

$$\mathcal{A}(\vec{x}) = \int_0^T \int_{\Omega_0} \frac{1}{2} \rho_0(\vec{X}) |\vec{x}_t|^2 d\vec{X} dt \quad (7)$$

where $\rho_0(\vec{X}) = \rho(\vec{X}, t)|_{t=0}$ is the initial mass. Then the variation with respect to \vec{x} (LAP), $\frac{\delta \mathcal{A}(\vec{x})}{\delta \vec{x}} = 0$, gives the Hamiltonian (energy conserved) part under the incompressibility condition, i.e., $\det(F) = 1$. The resulting equation is the Euler equation which has the total energy conservation,

$$\begin{aligned} \vec{u}_t + \vec{u} \cdot \nabla \vec{u} &= -\nabla p \\ \nabla \cdot \vec{u} &= 0. \end{aligned} \quad (8)$$

Next, we apply the MDP (variation with respect to function) for the dissipation in (5), $\frac{1}{2} \frac{\delta \Delta}{\delta \vec{u}} \Big|_{\varepsilon=0} = 0$, then we obtain the Stokes equation,

$$\begin{aligned} \mu \Delta \vec{u} &= \nabla \tilde{p} \\ \nabla \cdot \vec{u} &= 0 \end{aligned} \quad (9)$$

where \tilde{p} is a Lagrange multiplier for $\nabla \cdot \vec{u} = 0$.

Therefore, we have obtained the conservative part and dissipative one in incompressible Navier-Stokes equation (3) by the energetic variational approaches, LAP and MDP, respectively.

3. Energetic variational approaches in complex fluids. We consider a complex fluids and show that the system of equations are derived from the energy viewpoint using LAP and MDP.

There are several kinds of well-known complex fluids [7, 8, 10, 14, 25], for instance, viscoelastic material fluids with multiscale interactions, liquid crystals which is in the intermediate state between liquid and solid, magneto-hydrodynamical fluids, electro-rheological (ER) fluids, and fluid-fluid mixture models. The interaction/coupling between scales, or fluids, is complicated, but all have an essential feature of complex fluids. The hydrodynamic systems of complex fluids are all determined through the competition between kinetic energy and various internal elastic energies. In the meantime, the competitions are also reflected in the dissipations. Here we will use the free interface motion as an example to illustrate the underlying variational structure of these complicated systems.

We consider an immiscible two-phase flow model in complex fluids [19, 31, 32]. Let ϕ be a phase function such that $\phi(\vec{x}, t) = \pm 1$ in the incompressible fluids, and $\Gamma_t = \{x : \phi(\vec{x}, t) = 0\}$ be the interface of mixture. If we consider the immiscibility of fluids, then it gives the kinematic condition on Γ_t , which is $\vec{V} \cdot \vec{n} = (\vec{u} \cdot \vec{n}) \vec{n}$ where \vec{V} is the velocity of the interface Γ_t , and \vec{u} is the fluid velocity. In the Eulerian description, it implies the pure transport of ϕ , that is, the phase function ϕ satisfies

$$\phi_t + \vec{u} \cdot \nabla \phi = 0. \quad (10)$$

The following well-known energy, Ginzburg-Landau mixing energy, represents a competition between two fluids with their (hydro-) philic and (hydro-) phobic properties:

$$W(\phi, \nabla \phi) = \frac{1}{2} |\nabla \phi|^2 + \frac{1}{4\eta^2} (\phi^2 - 1)^2.$$

We easily see that the mixing energy functional $\mathcal{E} = \lambda \int W d\vec{x}$ where λ is a constant coefficient of the mixing energy is proportional to the area of the interface, Γ_t , and the equilibrium profile of interface is tanh-like function as $\eta \rightarrow 0$.

The total energy is defined by the combination of the kinetic energy and the internal energy as follows:

$$E^{total} = \int_{\Omega_t} \left\{ \frac{1}{2} |\vec{u}|^2 + \lambda W(\phi, \nabla\phi) \right\} d\vec{x}. \quad (11)$$

The action functional \mathcal{A} in terms of the flow map from the total energy (11) is

$$\mathcal{A}(\vec{x}) = \int_0^T \int_{\Omega_0} \left\{ \frac{1}{2} |\vec{x}_t|^2 - \lambda \left(\frac{1}{2} |F^{-1} \nabla_{\vec{x}} F \phi_0|^2 + \frac{1}{4\eta^2} |(F\phi_0)^2 - 1|^2 \right) \right\} \det F d\vec{X} dt. \quad (12)$$

Notice that the term, $|\nabla\phi|^2$, carries all information of the configuration which is determined by the deformation, F .

Remark 1. The expression in (12) includes all the kinematic transport property of the internal variable “ ϕ ”. With different kinematic transport relations, we will obtain different action functionals, even though the energies may have the same expression in the Eulerian coordinate. This is important for dynamics for materials like liquid crystals [17, 29].

Then the LAP leads us to the following Hamiltonian system:

$$\vec{u}_t + \vec{u} \cdot \nabla \vec{u} + \nabla p = -\lambda \nabla \cdot (\nabla\phi \otimes \nabla\phi - W(\phi, \nabla\phi)I) \quad (13)$$

$$\nabla \cdot \vec{u} = 0 \quad (14)$$

$$\phi_t + \vec{u} \cdot \nabla\phi = 0. \quad (15)$$

Remark 2. The above system (13)–(15) converges to (at least formally) the “sharp interface model” and its energy equation is

$$\frac{d}{dt} \int \left\{ \frac{1}{2} |\vec{u}|^2 + \lambda \left(\frac{1}{2} |\nabla\phi|^2 + \frac{1}{4\eta^2} (\phi^2 - 1)^2 \right) \right\} d\vec{x} = 0. \quad (16)$$

It shows that the total energy of the system is conserved. The system is a Hamiltonian system. The force, the right hand side of (13) is a conservative force with no dissipation of system.

Now, we consider the diffusive interface approach for immiscible two-phase flow model. The diffusive interface method is imposed by an additional dissipation term (relaxation) in the transport equation (15). Then we have the Allen-Cahn equation [5],

$$\phi_t + \vec{u} \cdot \nabla\phi = \gamma \left(\Delta\phi - \frac{1}{\eta^2} (\phi^2 - 1) \phi \right). \quad (17)$$

We also want to include the dissipation in flow field caused by the flow viscosity, μ . The dissipation in the diffusive interface approach is given by

$$\Delta = \int \left(\mu |\nabla\vec{u}|^2 + \lambda \gamma \left| \Delta\phi - \frac{1}{\eta^2} (\phi^2 - 1) \phi \right|^2 \right) d\vec{x}. \quad (18)$$

The phase dissipation which is the second term in (18) is not in the form of the quadratic of the “rate” functions [22, 23, 24]. Using the equation (17) we can manipulate the dissipation (18) in terms of a rate in time.

$$\Delta = \int \left(\mu |\nabla\vec{u}|^2 + \frac{\lambda}{\gamma} |\phi_t + \vec{u} \cdot \nabla\phi|^2 \right) d\vec{x}. \quad (19)$$

Then the variational principle (MDP), which is known as Onsager’s principle [22, 23, 24], $\frac{1}{2} \frac{\delta \Delta}{\delta \vec{u}} \Big|_{\varepsilon=0} = 0$ with incompressibility of flow, $\nabla \cdot \vec{u} = 0$, is employed to obtain a dissipative force.

$$\begin{aligned} \frac{\delta \Delta}{\delta \vec{u}} \Big|_{\varepsilon=0} &= 2 \int \left\{ \mu(\nabla \vec{u} + \varepsilon \nabla \vec{v}) : \nabla \vec{v} + \frac{\lambda}{\gamma}(\phi_t + (\vec{u} + \varepsilon \vec{v}) \cdot \nabla \phi) \vec{v} \cdot \nabla \phi \right\} d\vec{x} \Big|_{\varepsilon=0} \\ &= 2 \int \left\{ \mu \nabla \vec{u} : \nabla \vec{v} + \frac{\lambda}{\gamma}(\phi_t + \vec{u} \cdot \nabla \phi) \nabla \phi \cdot \vec{v} \right\} d\vec{x} \\ &= -2 \int \left\{ \mu \Delta \vec{u} - \frac{\lambda}{\gamma}(\phi_t + \vec{u} \cdot \nabla \phi) \nabla \phi \right\} \cdot \vec{v} d\vec{x} = 0. \end{aligned} \tag{20}$$

From the above resulting equation in (20) we obtain the following system with dissipative force:

$$\mu \Delta \vec{u} - \frac{\lambda}{\gamma}(\phi_t + \vec{u} \cdot \nabla \phi) \nabla \phi = \nabla \tilde{p} \tag{21}$$

$$\nabla \cdot \vec{u} = 0 \tag{22}$$

$$\phi_t + \vec{u} \cdot \nabla \phi = \gamma \left(\Delta \phi - \frac{1}{\eta^2}(\phi^2 - 1)\phi \right). \tag{23}$$

The system (21)–(23) satisfies the following energy law:

$$\frac{d}{dt} \int \lambda \left(\frac{1}{2} |\nabla \phi|^2 + \frac{1}{4\eta^2}(\phi^2 - 1)^2 \right) d\vec{x} = - \int \left(\mu |\nabla \vec{u}|^2 + \frac{\lambda}{\gamma} |\phi_t + \vec{u} \cdot \nabla \phi|^2 \right) d\vec{x}. \tag{24}$$

Combine the systems, (13)–(15) and (21)–(23) obtained by LAP and MDP, respectively, we have the following system for the two-phase flow model:

$$\vec{u}_t + \vec{u} \cdot \nabla \vec{u} + \nabla p = \mu \Delta \vec{u} - \frac{\lambda}{\gamma}(\phi_t + \vec{u} \cdot \nabla \phi) \nabla \phi \tag{25}$$

$$\nabla \cdot \vec{u} = 0 \tag{26}$$

$$\phi_t + \vec{u} \cdot \nabla \phi = \gamma \left(\Delta \phi - \frac{1}{\eta^2}(\phi^2 - 1)\phi \right). \tag{27}$$

The most amazing fact from the above derivation is the dissipation force from MDP in (21). The dissipative term, $-\frac{\lambda}{\gamma}(\phi_t + \vec{u} \cdot \nabla \phi) \nabla \phi$ in (21), is exactly same as the conservative term, $\nabla \cdot (\nabla \phi \otimes \nabla \phi - W(\phi, \nabla \phi)I)$ from LAP in (13).

Moreover, as $\eta \rightarrow 0$, this is exactly the surface tension force on the interface [31]. This system (25)–(27) satisfies the dissipative energy law.

$$\begin{aligned} &\frac{d}{dt} \int \left\{ \frac{1}{2} |\vec{u}|^2 + \lambda \left(\frac{1}{2} |\nabla \phi|^2 + \frac{1}{4\eta^2}(\phi^2 - 1)^2 \right) \right\} d\vec{x} \\ &= - \int \left(\mu |\nabla \vec{u}|^2 + \frac{\lambda}{\gamma} |\phi_t + \vec{u} \cdot \nabla \phi|^2 \right) d\vec{x}. \end{aligned} \tag{28}$$

This procedure using the energetic variation, especially, MDP sometimes gives advantage in designing numerical algorithms. If the dissipative force in (25) is substituted by the conservative force in (13), then the following equation is obtained

$$\vec{u}_t + \vec{u} \cdot \nabla \vec{u} + \nabla p = \mu \Delta \vec{u} - \lambda \nabla \cdot (\nabla \phi \otimes \nabla \phi - W(\phi, \nabla \phi)I). \tag{25'}$$

Moreover, the system (25'), (26), (27), satisfies the following energy law:

$$\frac{d}{dt} \int \left\{ \frac{1}{2} |\vec{u}|^2 + \lambda \left(\frac{1}{2} |\nabla \phi|^2 + f(\phi) \right) \right\} d\vec{x} = - \int (\mu |\nabla \vec{u}|^2 + \lambda \gamma |\Delta \phi - f'(\phi)|^2) d\vec{x} \tag{29}$$

where $f(\phi) = \frac{1}{4\eta^2}(\phi^2 - 1)^2$. Since in derivation of the energy (29), the equation (27) is multiplied by $\Delta\phi - \frac{1}{\eta^2}(\phi^2 - 1)\phi$, a numerical algorithm to solve (25'), (26), (27), requires a high order approximation for the phase field solution to preserving the energy (29). On the other hand, to derive the energy (28) we multiply $\phi_t + \bar{u} \cdot \nabla\phi$, thus, in solving the system (25)–(27) a numerical algorithm can be implemented in a low order approximation for ϕ to preserve the energy (28).

Remark 3. It may be strange that in the equation (25)–(27) the surface tension can be viewed as a dissipative force. In fact, this is due to the relaxation of the ϕ equation. To see this let's look at the simple viscoelastic fluids. For instance, we consider an incompressible viscoelastic complex fluid model with the elastic energy, $W(F) = |F|^2$ [18]. Then the energy equation is given by

$$\frac{d}{dt} \int \left(\frac{1}{2}|\bar{u}|^2 + \frac{1}{2}|F|^2 \right) d\bar{x} = - \int \mu|\nabla\bar{u}|^2 d\bar{x}. \tag{30}$$

The following system of equations satisfies the energy law (30):

$$\bar{u}_t + \bar{u} \cdot \nabla\bar{u} + \nabla p = \mu\Delta\bar{u} + \nabla \cdot (W_F F^{-T}) \tag{31}$$

$$\nabla \cdot \bar{u} = 0 \tag{32}$$

$$F_t + \bar{u} \cdot \nabla F = \nabla\bar{u}F \tag{33}$$

with $\det(F) = 1$. The dissipation in (30) does not include the rate functions in terms of F . The force $W_F F^{-T}$ is only a conservative force. The MDP can be applied only on \bar{u} variable to obtain the viscosity term, $\Delta\bar{u}$. If we add an artificial term ΔF like in viscosity method for hyperbolic system into (33) without further discussion of the physical meaning on this artificial “viscosity” term (as an approximation of the original equation (33)), then the resulting equation is

$$F_t + \bar{u} \cdot \nabla F = \nabla\bar{u}F + \varepsilon^2\Delta F. \tag{33'}$$

Now, we can apply the MDP for the system (31), (32), (33').

Moreover, the system (31), (32), (33') satisfies the following energy equation:

$$\frac{d}{dt} \int \left(\frac{1}{2}|\bar{u}|^2 + \frac{1}{2}|F|^2 \right) d\bar{x} = - \int (\mu|\nabla\bar{u}|^2 + \varepsilon^2|\nabla F|^2) d\bar{x}. \tag{34}$$

The extra dissipation on F in (34) can be written from (33') in terms of a “rate” function, using the Riesz transformation, \mathcal{R} which is defined by

$$\mathcal{R}[g](\bar{x}) = c_n \int \frac{(\bar{x} - \bar{y})}{|\bar{x} - \bar{y}|^n} g(\bar{y}) d\bar{y}$$

where $n > 2$ is the space dimension, and c_n is a constant depended on n [28]. Then the resulting energy equation is

$$\frac{d}{dt} \int \left(\frac{1}{2}|\bar{u}|^2 + \frac{1}{2}|F|^2 \right) d\bar{x} = - \int (\mu|\nabla\bar{u}|^2 + \varepsilon^2\mathcal{R}[F_t + \bar{u} \cdot \nabla F - \nabla\bar{u}F]^2) d\bar{x}. \tag{35}$$

and $W_F F^{-T}$ can also be derived from MDP.

In the next section, we present numerical experiments, and discuss its results as a verification for the system (25)–(27) driven by the energetic variational approaches.

4. Numerical simulations. The numerical experiments for two-phase flow problem (25)–(27) modeled by diffusive interface approach are carried out using finite element methods [4, 6, 11]. We discuss algorithms to solve the problem (25)–(27) and its numerical results. We here emphasize again that if the system (25'), (26), (27), is employed to solve two-phase flow problem then the finite element space for the phase field ϕ , has to have at least H^2 -regularity, for instance, P_2 finite element space, usually, or at least biquadratic element space, to preserve the dissipative energy law (29) [20, 21]. Here P_k means the space of polynomials up to order k . But high order ($k > 1$) finite element spaces incur expensive computational costs. Meanwhile, the energy law (28) for the system (25)–(27) allows us to employ a lower order finite element space, for instance, P_1 element for the phase solution ϕ .

In numerical simulations the finite element spaces and mesh generations are implemented by the *FreeFem++* [12]. In discretization, the superscript n means the time step, and the subscript h is used for the discrete space variable. The following finite element spaces for the finite dimensional solution pair (\vec{u}_h, p_h, ϕ_h) are used to solve (25)–(27):

$$\vec{u}_h \in \mathbf{V}_h = (P_1 \oplus \text{bubble})^2 \quad (36)$$

$$p_h \in W_h = P_1 \quad (37)$$

$$\phi_h \in Q_h = P_1, \quad (38)$$

where the bubble function is the basis function which is zero at all nodal points and has an nonzero interior degree of freedom at center point in each element.

The computational domain is the unit square. The initial velocity field is $\vec{u}_0 = \vec{0}$, and the initial phase ϕ_0 is given by

$$\phi_0(x, y) = \tanh\left(\frac{d_1(x, y)}{\sqrt{2}\eta}\right) + \tanh\left(\frac{d_2(x, y)}{\sqrt{2}\eta}\right) - 1.0, \quad (39)$$

where d_1, d_2 are the distance functions from the circle centered at (0.38, 0.5) radius $r = 0.11$ and at (0.62, 0.5) radius $r = 0.11$, respectively. The explicit forms of d_1 and d_2 are given as follows:

$$\begin{aligned} d_1(x, y) &= \sqrt{(x - 0.38)^2 + (y - 0.5)^2} - 0.11, \\ d_2(x, y) &= \sqrt{(x - 0.62)^2 + (y - 0.5)^2} - 0.11. \end{aligned}$$

We can easily see the fact that the initial value (39) is an approximation of the following phase field:

$$\phi_0 = \begin{cases} -1, & \text{inside region of circles} \\ 1, & \text{outside region of circles.} \end{cases} \quad (40)$$

Remark 4. Since the system (25)–(27) is a highly nonlinear system of equations consisting of incompressible Navier-Stokes equation with the stress term and Allen-Cahn equation, there are quite a few approximation schemes to solve the system, for instance, the characteristic Galerkin finite element method for the approximation of the convection term in Navier-Stokes equation gives

$$\vec{u}_t + (\vec{u} \cdot \nabla)\vec{u} \approx \frac{\vec{u}_h^{n+1} - \vec{u}_h^n(\vec{x} - \vec{u}_h^n \Delta t)}{\Delta t}. \quad (41)$$

This approximation scheme gives a quadratic convergence order [5, 9, 26]. Also one might consider the stabilized semi-implicit scheme for Allen-Cahn equation (27) [19]. But the approximation (41) for the convection term sometimes breaks

the dissipative energy law. In fact, when we used the approximation (41) for the numerical experiments, we observed that the dissipative law of the total energy is violated during the simulations, especially, in the beginning stage of the time.

To preserve the finite dimensional dissipative energy law analogous to (28) an explicit-implicit second order temporal discretization algorithm is employed for numerical experiments [16, 17]. The variational formulation for the solution $(\bar{u}_h^{n+1}, p_h^{n+1}, \phi_h^{n+1})$ using the explicit-implicit scheme is given as follows:

$$\begin{aligned}
 & (\tilde{u}_{h,t}^{n+1}, \vec{v}_h) + \left(\left(\frac{3\bar{u}_h^n - \bar{u}_h^{n-1}}{2} \cdot \nabla \right) \bar{u}_h^{\frac{n+1}{2}}, \vec{v}_h \right) + \left(\frac{1}{2} \left(\nabla \cdot \frac{3\bar{u}_h^n - \bar{u}_h^{n-1}}{2} \right) \bar{u}_h^{\frac{n+1}{2}}, \vec{v}_h \right) \\
 & - (p_h^{\frac{n+1}{2}}, \nabla \cdot \vec{v}_h) = -(\mu \nabla \bar{u}_h^{\frac{n+1}{2}}, \nabla \vec{v}_h) - \frac{\lambda}{\gamma} \left(\tilde{\phi}_{h,t}^{n+1} \nabla \left(\frac{3\phi_h^n - \phi_h^{n-1}}{2} \right), \vec{v}_h \right) \quad (42)
 \end{aligned}$$

$$\begin{aligned}
 & - \frac{\lambda}{\gamma} \left(\bar{u}_h^{\frac{n+1}{2}}, \nabla \left(\frac{3\phi_h^n - \phi_h^{n-1}}{2} \right) \right) \left(\nabla \left(\frac{3\phi_h^n - \phi_h^{n-1}}{2} \right), \vec{v}_h \right) \quad \text{for all } \vec{v}_h \in \mathbf{V}_h, \\
 & (\nabla \cdot \bar{u}_h^{\frac{n+1}{2}}, w_h) = 0 \quad \text{for all } w_h \in W_h, \quad (43)
 \end{aligned}$$

$$\begin{aligned}
 & (\tilde{\phi}_{h,t}^{n+1}, q_h) + \left(\bar{u}_h^{\frac{n+1}{2}}, \left(\frac{3\phi_h^n - \phi_h^{n-1}}{2} \right) q_h \right) \\
 & = -\gamma \left(\nabla \phi_h^{\frac{n+1}{2}}, \nabla q_h \right) - \frac{\gamma}{\eta^2} (f_h(\phi_h^n, \phi_h^{n+1}), q_h) \quad \text{for all } q_h \in Q_h \quad (44)
 \end{aligned}$$

where

$$f_h(\phi_h^n, \phi_h^{n+1}) = \left\{ \frac{(|\phi_h^{n+1}|^2 - 1) + (|\phi_h^n|^2 - 1)}{2} \right\} \phi_h^{\frac{n+1}{2}},$$

$$\tilde{u}_{h,t}^{n+1} = \frac{\bar{u}_h^{n+1} - \bar{u}_h^n}{\Delta t}, \quad \bar{u}_h^{\frac{n+1}{2}} = \frac{\bar{u}_h^{n+1} + \bar{u}_h^n}{2}, \quad \tilde{\phi}_{h,t}^{n+1} = \frac{\phi_h^{n+1} - \phi_h^n}{\Delta t}, \quad \phi_h^{\frac{n+1}{2}} = \frac{\phi_h^{n+1} + \phi_h^n}{2},$$

(\cdot, \cdot) is the inner product operator, and Δt is the time step for simulations. Here we employ the penalty method for Navier-Stokes equation [4, 11, 30]. Then the equation (43) is replaced by

$$(\nabla \cdot \bar{u}_h^{\frac{n+1}{2}}, w_h) + \varepsilon (p_h^{\frac{n+1}{2}}, w_h) = 0 \quad \text{for all } w_h \in W_h \quad (43')$$

where ε is a small positive constant, $0 < \varepsilon \ll 1$. In numerical simulations, we usually take $\varepsilon = 10^{-6}$. Then the variational problem, (42), (43'), (44) satisfies the following finite dimensional dissipative energy law:

$$\begin{aligned}
 & \left[\int \left\{ \frac{1}{2} |\bar{u}_h^{n+1}|^2 + \lambda \left(\frac{1}{2} |\nabla \phi_h^{n+1}|^2 + \frac{1}{4\eta^2} |\phi_h^{n+1} - 1|^2 \right) \right\} d\vec{x} \right]_{h,t} \\
 & = - \int \left\{ \mu |\nabla \bar{u}_h^{n+1}|^2 + \varepsilon |\phi_h^{\frac{n+1}{2}}|^2 + \frac{\lambda}{\gamma} \left| \tilde{\phi}_{h,t}^{n+1} + \left(\bar{u}_h^{\frac{n+1}{2}} \cdot \nabla \right) \left(\frac{3\phi_h^n - \phi_h^{n-1}}{2} \right) \right|^2 \right\} d\vec{x}. \quad (45)
 \end{aligned}$$

One can find a detailed discussion on explicit-implicit second order temporal discretization algorithm and other numerical schemes for the liquid crystal problems in [16, 17, 20, 21].

We want to point out that it is difficult/challenging to obtain the optimal order error estimate of the variational problem (42), (43'), (44). In [16, 17] related to the explicit-implicit scheme, the authors present the convergence estimate for the explicit-implicit scheme in fixed point nonlinear iteration under the certain condition.

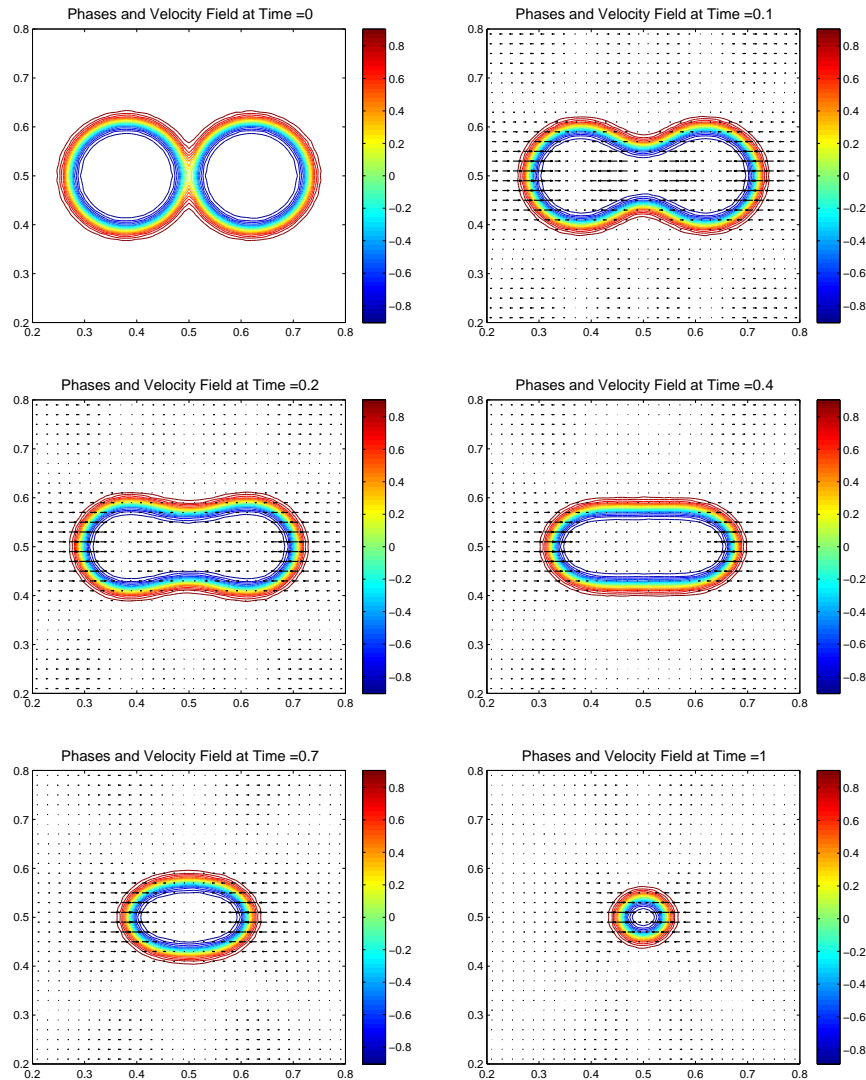


FIGURE 2. The time evolution results (merging effect) of phase field and velocity field from left to right and top to bottom ($t = 0.0, 0.1, 0.2, 0.4, 0.7, 1.0$ and $\Delta t = 0.001$).

Throughout the numerical experiments, the Ginzburg-Landau energy coefficient λ is set by 10^{-4} , the dissipation coefficient γ by 10^{-2} , and the thickness η of the diffusive interface region by 10^{-2} . The resulting linear system was solved by the direct solver using Crout decomposition, which is efficiently implemented by *FreeFem++* package [12]. The numerical results of time evolution for the phase field (contour) and the velocity field (vector) in variational problem (42), (43'), (44) are presented in Figure 2 through the contour plots at time, $t = 0.0, 0.1, 0.2, 0.4, 0.7, 1.0$, and the total energy (left) and the kinetic energy (right) in Figure 3. These numerical results demonstrate that the lower order finite element space for phase field satisfactorily

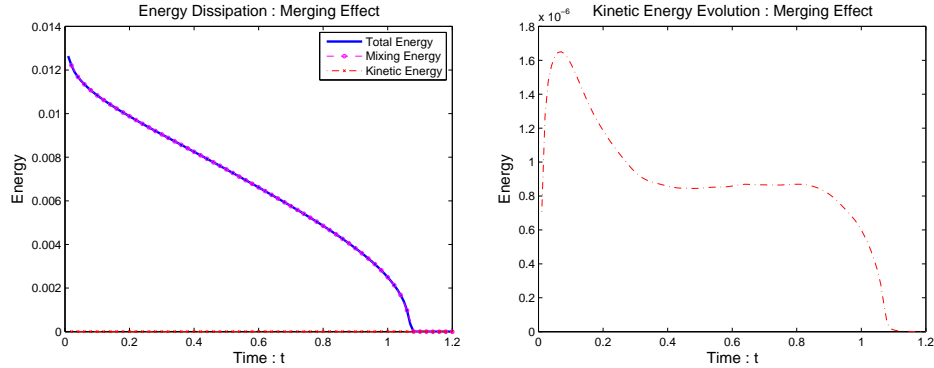


FIGURE 3. The total energy dissipation (left) and the kinetic energy (right) of merging phenomena in two-phase interface model.

works to catch the merging phenomena of two-phase flow model with the system (25)–(27). The left picture in Figure 3 shows the total energy dissipation. The elastic internal energy is dominant throughout the simulation, that is, the kinetic energy is very small. The right picture in Figure 3 shows the evolution of kinetic energy. The kinetic energy is increasing until time $t = 0.1$ and then it is decreasing because the flow fields effect induced by the motion by mean-curvature is stronger in the beginning than in other time, that is, the motion by mean-curvature decreases as the interface becomes smooth. After the merging region of interface becomes flat, the kinetic energy increases very slightly until $t = 0.9$ and then rapidly vanishes.

The next simulation is set by the following initial conditions:

$$\vec{u}_0 = \vec{0}, \quad \phi_0 = \tanh\left(\frac{d_1(x, y)}{\sqrt{2}\eta}\right) + \tanh\left(\frac{d_2(x, y)}{\sqrt{2}\eta}\right) - 1.0 \quad (46)$$

with

$$\begin{aligned} d_1(x, y) &= \sqrt{(x - 0.38)^2 + (y - 0.38)^2} - 0.22, \\ d_2(x, y) &= \sqrt{(x - 0.70)^2 + (y - 0.70)^2} - 0.08. \end{aligned}$$

The results of interface evolution with the flow field induced by surface tension of the interface are presented in Figure 4, and its total energy (left) and kinetic energy (right) in Figure 5. Figure 4 also shows the behavior of interfaces. The interface in the shape of small circle is dissipated faster than that of large circle. In the simulation, the mixing energy dissipation shows a dominant behavior similar to the previous merging effect case. We also observe that at the vanishing time, around $t = 0.25$ of the small interface, the total energy is rapidly decreasing because its interface is vanishing, dramatically.

5. Conclusion. We employed the energetic variational approaches in hydrodynamic system of complex fluids to derive the hydrodynamic forces, conservative force, dissipative force. The Hamiltonian part (the hydrodynamic conservative force) of system is derived from the energy law by LAP, and the dissipative part by MDP. One important thing in MDP (Onsager’s principle) in the energetic variational approaches is whether the dissipation functional includes the “rate” functions in time t of all “variables”. If this is the case, then the conservative force in hydrodynamic system is consistent with the dissipative force. As presented in this

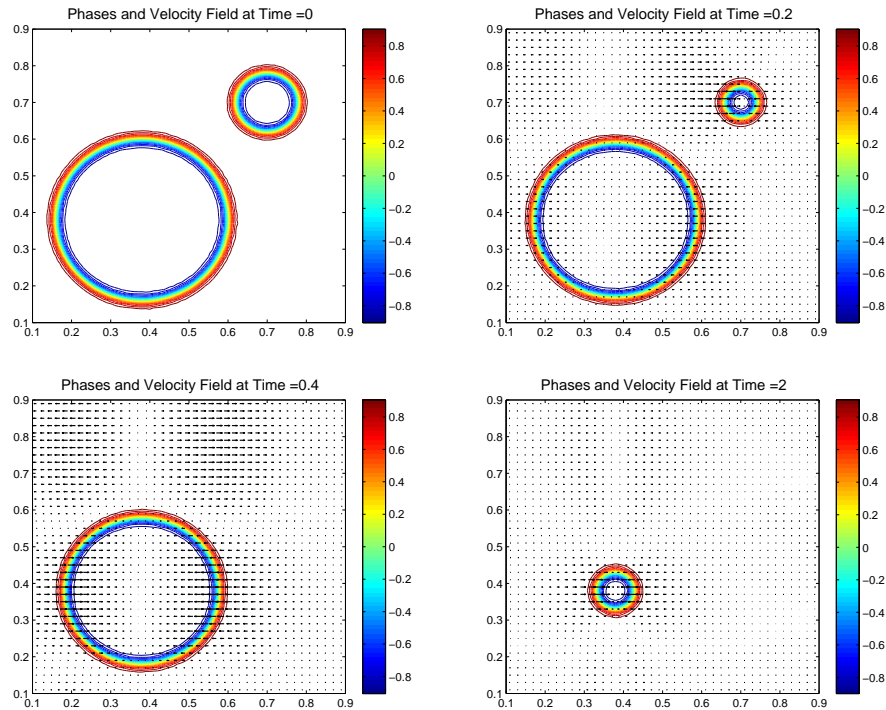


FIGURE 4. The time evolution results of phase field and velocity field from left to right and top to bottom ($t = 0.0, 0.2, 0.4, 2.0$ and $\Delta t = 0.001$).

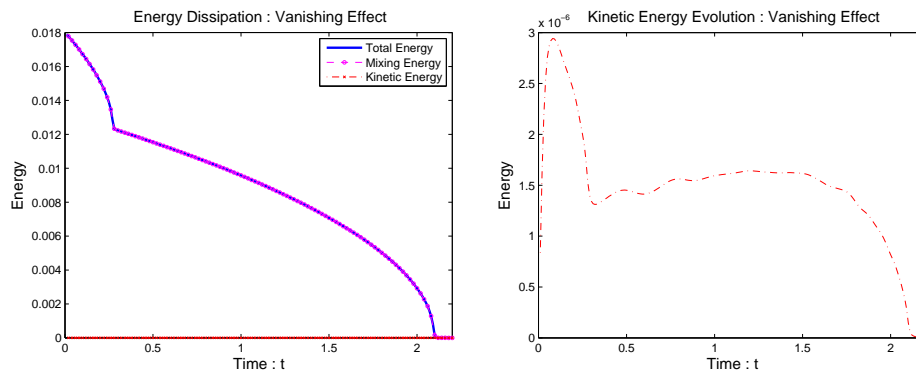


FIGURE 5. The total energy dissipation (left) and the kinetic energy (right) of vanishing phenomena in two-phase interface model.

paper, this procedure, MDP plays an important role in designing numerical algorithms to solve the hydrodynamic complex fluid problem. Through MDP, a system of equations can be reformulated to employ a numerical algorithm with lower order element to solve a complex fluid problem, and still preserve the dissipation energy law.

Finally, we want to point out that the system derived by MDP does give rise to a different challenge in numerical analysis. An additional time derivative term and convection terms in hydrodynamic force have appeared in the system of equations. It is important (difficult) to obtain an error estimate of optimal order for the finite element method. One of our next objectives in this area is to find other discretization schemes to solve the system and prove the optimal order of convergence.

REFERENCES

- [1] D. M. Anderson, G. B. McFadden and A. A. Wheeler, *Diffuse-interface methods in fluid mechanics*, Annual Review of Fluid Mechanics, **30** (1998), 139–165.
- [2] R. B. Bird, R. C. Armstrong and O. Hassager, “Dynamics of Polymeric Fluids,” Vol. 1, Fluid Mechanics, John Wiley & Sons, New York, 1977.
- [3] R. B. Bird, O. Hassager, R. C. Armstrong and C. F. Curtiss, “Dynamics of Polymeric Fluids,” Vol. 2, Kinetic Theory, John Wiley & Sons, New York, 1977.
- [4] F. Brezzi and M. Fortin, “Mixed and Hybrid Finite Element Methods,” Springer-Verlag, New York, 1991.
- [5] J. W. Cahn and S. M. Allen, *A microscopic theory for domain wall motion and its experimental verification in Fe-Al alloy domain growth kinetics*, J. Phys. Colloque C7, (1978), C7–C51.
- [6] P. G. Ciallet, “The Finite Element Method for Elliptic Equations,” North-Holland, Amsterdam, 1978.
- [7] P. G. de Gennes and J. Prost, “The Physics of Liquid Crystals,” 2nd edition, Oxford Science Publications, Oxford, (1993).
- [8] M. Doi and S. F. Edwards, “The Theory of Polymer Dynamics,” Clarendon Press, Oxford, UK, 1986.
- [9] J. Douglas and T. F. Russell, *Numerical methods for convection dominated diffusion problems based on combining the method of characteristics with finite element methods of finite difference method*, SIAM J. Numer. Anal., **19** (1982), 871–885.
- [10] J. L. Erickson, *Conservation laws for liquid crystals*, Trans. Soc. Rheol., **5** (1961), 23–34.
- [11] V. Girault and P. A. Raviart, “Finite Element Methods for Navier-Stokes Equations,” Springer-Verlag, Berlin, 1986.
- [12] F. Hecht, O. Pironneau, A. Le Hyaric and K. Ohtsuka, *FreeFem++*, <http://www.freefem.org>, 2007.
- [13] D. Jacqmin, *Calculation of two-phase Navier-Stokes flows using phase-field modeling*, J. Comput. Phys., **155** (1999), 96–127.
- [14] R. G. Larson, “The Structure and Rheology of Complex Fluids,” Oxford University Press, New York, 1999.
- [15] F. H. Lin and C. Liu, *Global existence of solutions for the Erickson Leslie-system*, Arch. Rat. Mech. Anal., **154** (2001), 135–156.
- [16] P. Lin and C. Liu, *Simulation of singularity dynamics in liquid crystal flows: A C^0 finite element approach*, J. Comput. Phys., **215** (2006), 348–362.
- [17] P. Lin, C. Liu and H. Zhang, *An energy law preserving C^0 finite element scheme for simulation the kinematic effects in liquid crystal flow dynamics*, J. Comput. Phys., **227** (2007), 1411–1427.
- [18] F. H. Lin, C. Liu and P. Zhang, *On hydrodynamics of viscoelastic fluids*, Comm. Pure Appl. Math., **58** (2005), 1437–1471.
- [19] C. Liu and J. Shen, *A Phase field model for the mixture of two incompressible fluids and its approximation by a Fourier-spectral method*, Physica D, **179** (2003), 211–228.
- [20] C. Liu and N. J. Walkington, *Approximation of liquid crystal flows*, SIAM J. Numer. Anal., **37** (2000), 725–741.
- [21] C. Liu and N. J. Walkington, *Mixed methods for the approximation of liquid crystal flows*, M2AN, **36** (2002), 205–222.
- [22] L. Onsager, *Reciprocal relations in irreversible processes I*, Phys. Rev. **37** (1931), 405–426.
- [23] L. Onsager, *Reciprocal relations in irreversible processes II*, Phys. Rev. **38** (1931), 2265–2279.
- [24] L. Onsager and S. Machlup, *Fluctuations and irreversible processes*, Phys. Rev. **91** (1953), 1505–1512.

- [25] R. G. Owens and T. N. Phillips, “Computational Rheology,” Imperial College Press, London, 2002.
- [26] O. Pironneau, *On the transport-diffusion algorithm and its applications to the Navier-Stokes equations*, Numer. Math., **38** (1981/82), 309–332.
- [27] H. Rui and M. Tabata, *A second order characteristic finite element scheme for convection diffusion problems*, Numer. Math., **92** (2002), 161–177.
- [28] E. M. Stein, “Singular Integrals and Differentiability Properties of Functions,” Princeton University Press, 1970.
- [29] H. Sun and C. Liu, *On energetic variational approaches in modeling the nematic liquid crystal flows*, Discrete and Continuous Dynamical Systems, **23** (2009), 455–475.
- [30] R. Temam, “Navier-Stokes Equations,” North-Holland, Amsterdam, 1977.
- [31] X. F. Yang, J. J. Feng, C. Liu and J. Shen, *Numerical simulations of jet pinching-off and drop formation using an energetic variational phase-field method*, J. Comput. Phys., **218** (2006), 417–428.
- [32] P. T. Yue, C. F. Zhou, J. J. Feng, C. F. Ollivier-Gooch and H. H. Hu, *Phase-field simulations of interfacial dynamics in viscoelastic fluids using finite elements with adaptive meshing*, J. Comput. Phys., **219** (2006), 47–67.

Received November 2008; revised April 2009.

E-mail address: hyon@ima.umn.edu

E-mail address: kdy@kaist.ac.kr

E-mail address: liu@math.psu.edu; liu@ima.umn.edu